


Technical Data Sheet

Dimension	150x600x4.0mm
Wearlayer	0.5mm
Weight	appr. 7.6 kg / m ²
Packing	12pcs/ctns, 156ctns/plt
Guarantee *	
Commercial Area	5 years
Residential Area	10 years



	Property	Test Method Standard	Test results
	Class 23 Heavy Domestic Class 31 Moderate Commercial	EN ISO 10582	Home, offices (0.3mm)
	Class 33 Heavy Commercial Class 42 General Light Industrial	EN ISO 10582	School, Stores, Hospital, Airport (0.5mm)
	Class 34 Very Heavy Commercial Class 43 Heavy Light Industrial	EN ISO 10582	Warehouses, Workshops (0.7mm)
	Reaction to fire	EN 13501-1	Bfl - s1
	Slip resistance	EN 13893	DS
	Residual indentation	ASTM F1914-17	Average ≤ 0.18mm
	Resistance to chemicals	ASTM F925-13	Pass
	Resistance to light	ASTM F1515-15	(avg, max) ΔE* < 8
	Resistance to heat	ASTM F1514-03(2013)	(avg, max) ΔE* < 8
	Formaldehyde emission	EN717-1	E1
	SVHC	REACH	Pass
	French VOC	ISO16000	A+
	Thermal Resistance	EN12667:2001	0.051 (m ² . K) /W
	Thermal Conductivity	EN12667:2001	0.09 (W/m. K)
	Static load resistance	ASTM F970-17	Max. residual indent ≤ 0.13mm
	Size	ASTM F2055-17	
	Squareness	ISO 24337: 2006	Pass
	Overall thickness	ASTM F2055	≤ 0.25mm
	Flatness	ASTM F387	± 0.13mm
	Openings	ISO 24337: 2006	Pass
	Ledging	ISO 24337: 2006	Average ≤ 0.1mm
	Surface integrity	ASTM F1914-17	Average ≤ 0.1mm
	Dimensional stability	ASTM F1914-17	Pass
	Curl	ISO 23999: 2008	Pass
	Phthalates content	ISO 23999: 2008	≤ 2mm
	VOC	16 CFR 1307	ND
		ISO16000-9: 2006	
		ISO16000-11: 2006	Pass

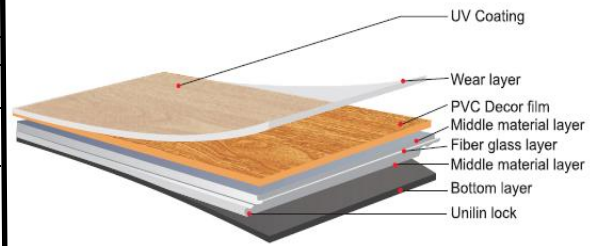